


(GFEFUSE®) ANL-C® Small fork bolt (bolt) single-hole automobile fuse

1. Dimensions (mm)

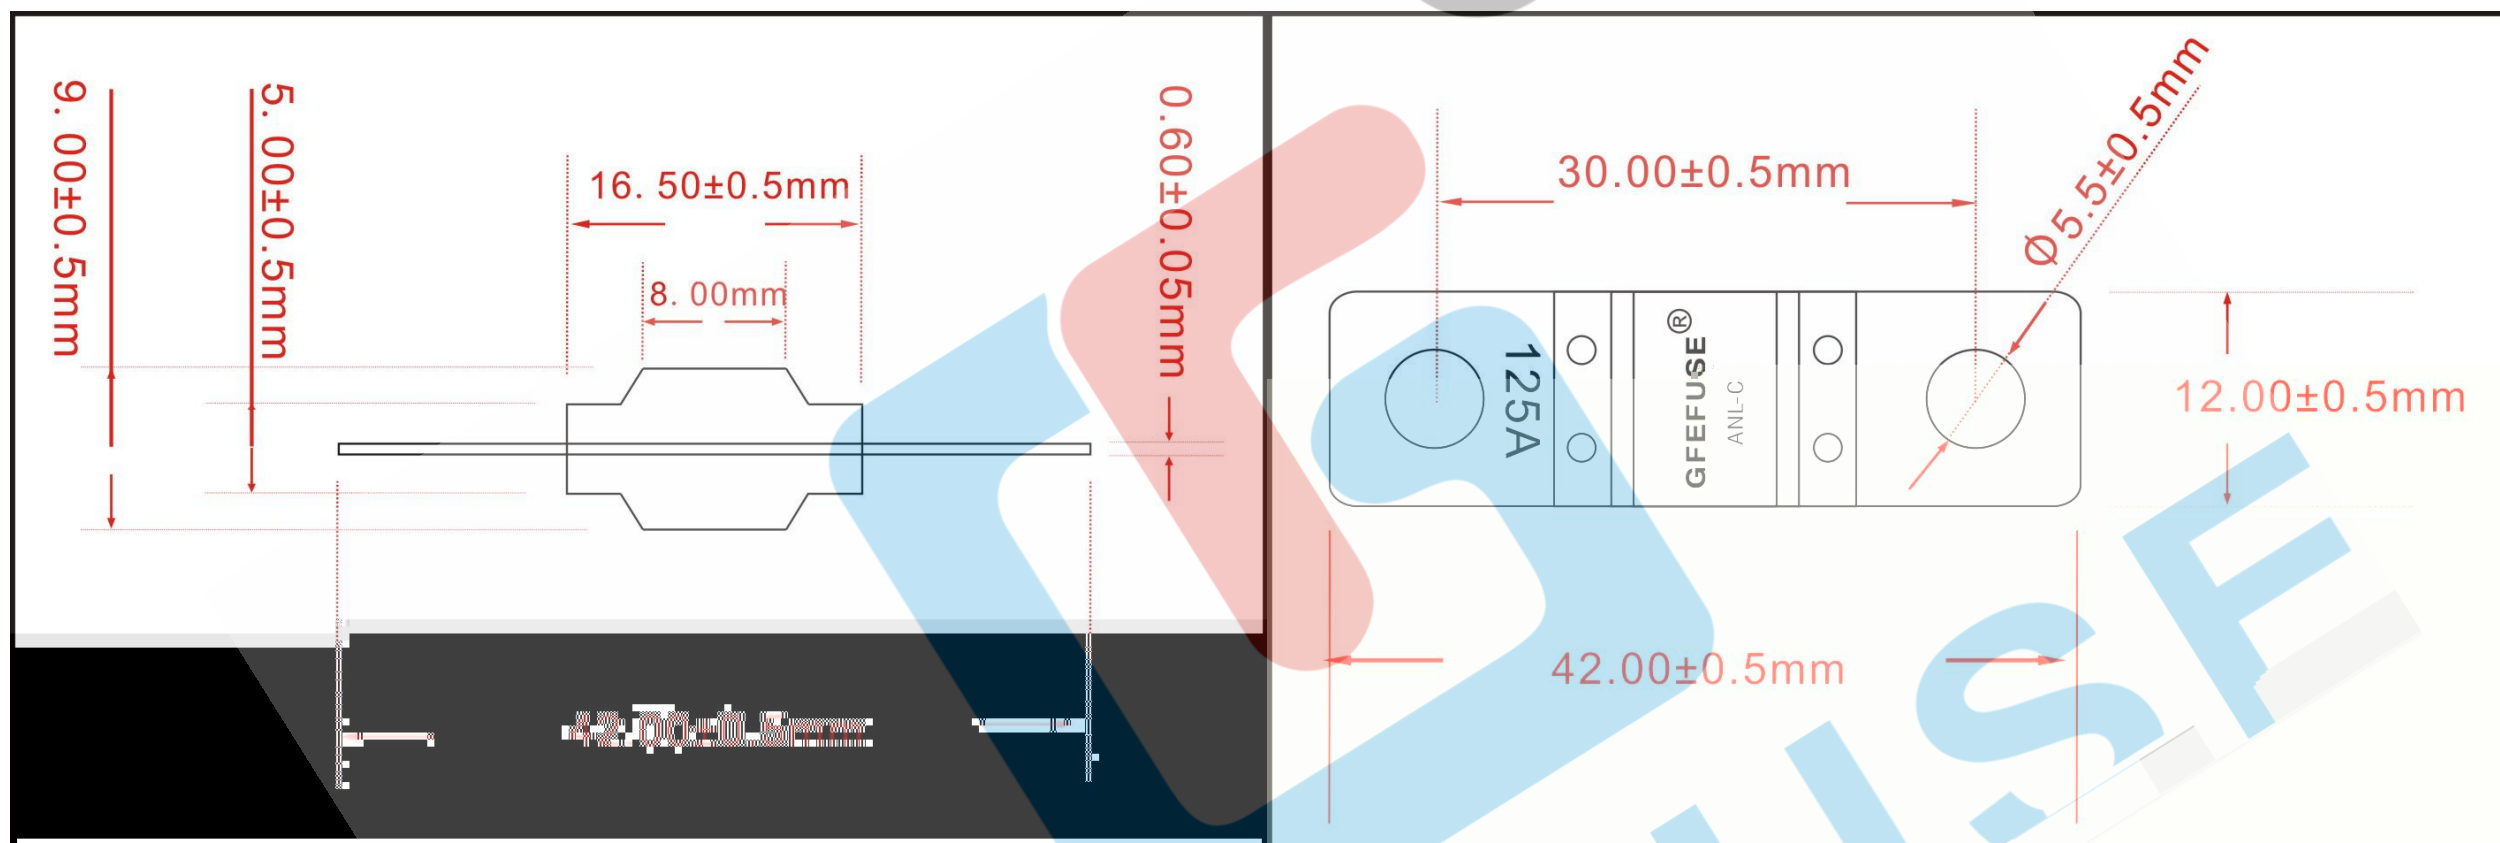

2. Specifications

Interrupting Rating: 1000A @ 32V/DC

Voltage Rating: 32V/58V/72V/80VDC

Operating Temperature Range: -40°C to +125°C

Housing: Transparent Nylon Composite

Terminal: Tin plated Copper

Mounting Torque M5: 4.5 Nm +/- 1Nm

IATF16949:2016 Quality system certification enterprise

Note: special voltage needs only, conventional voltage 32V/ 48V/58V/72V/80VDC

Tip: If there is an change in the product, please communicate with technicians to avoid misselection.

The performance of the product varies greatly depending on the operating environment and temperature

3. Time-Current Characteristics

Rated current%	Fusing time 30A~125A		Fusing time 150A~200A	
	Minimum	Maximum	Minimum	Maximum
100%	---	4h	---	4h
200%	1 second	100 second	1 second	15 second
300%	0.3 second	3 second	---	---
350%	0.1second	---	0.3 second	5 second
500%	0.1 second	1 second	---	---
600%	---	---	0.1 second	1 second

4.Ratings

				2
- 020	23 /20	65	2.722	1400
- 030	30	65	2.06	4200
- 040	40	65	1.3	10000
- 050	50	65	1.025	13000
- 060	60	6	0.65	21700
- 070	70	70	0.72	24000
- 0 0	0	5	0.541	24600
- 100	100	60	0.457	51300
- 125	125	71	0.3 4	73200
- 150	150	77	0.323	1 00
- 175	175	77	0.2 5	100000
- 200	200	77	0.261	125000

5.Time-Current Characteristic Curves

